

### TILLVAL

MEAN WELL DRIVER  
 SLG serien A: Standard  
 SLG serien B: Dimbar 0-10V  
 SLG serien DA: Dimbar DALI



### ANVÄNDNINGSSOMRÅDEN

Fabriker, produktionsanläggningar, stålverk, lager, gårdar, idrottsanläggningar, verkstäder, stormarknader, varuhus, showrooms, gallerior m.m.



**IP65-KLASSAD**



**AC100-277V 50/60 Hz**



**ENKEL INSTALLATION**




**140 LUMEN/W**




MODELL	LJUSFLÖDE	MÅTT (DxH)	VIKT
80W	11.200 LUMEN	330x193 mm	3,50 kg
100W	14 000 LUMEN	330x193 mm	3,50 kg
120W	16 800 LUMEN	330x193 mm	3,50 kg
150W	21 000 LUMEN	330x193 mm	3,50 kg
200W	28 000 LUMEN	380x200 mm	5,50 kg
240W	33 600 LUMEN	380x200 mm	5,50 kg

### REFERENSBILDER

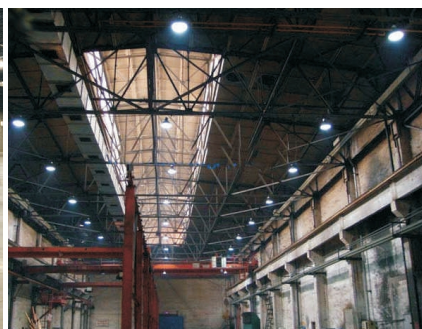


## DIMENSIONER (MM)

## FOTOMETRISK INFORMATION

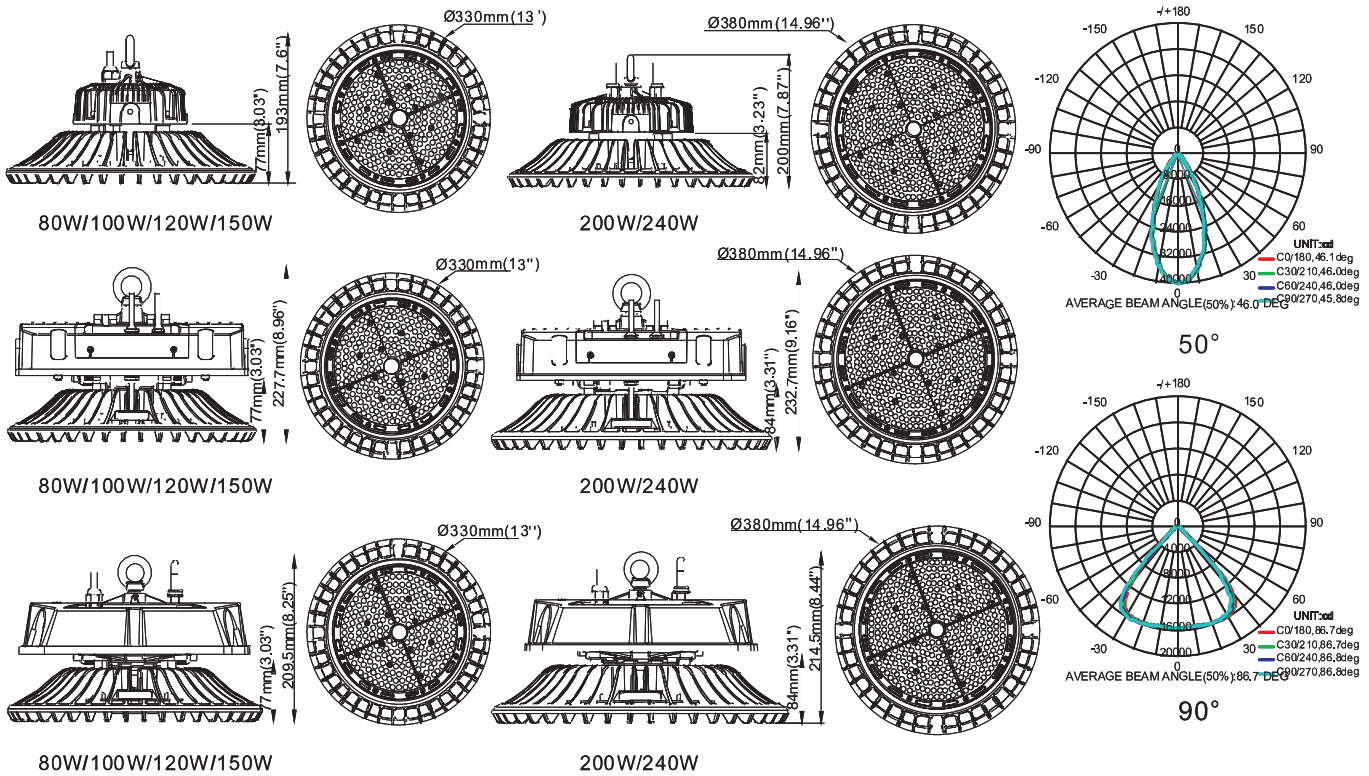


## INSTALLATION OCH ANVÄNDNING

### P1 Mounting Ring (Standard)

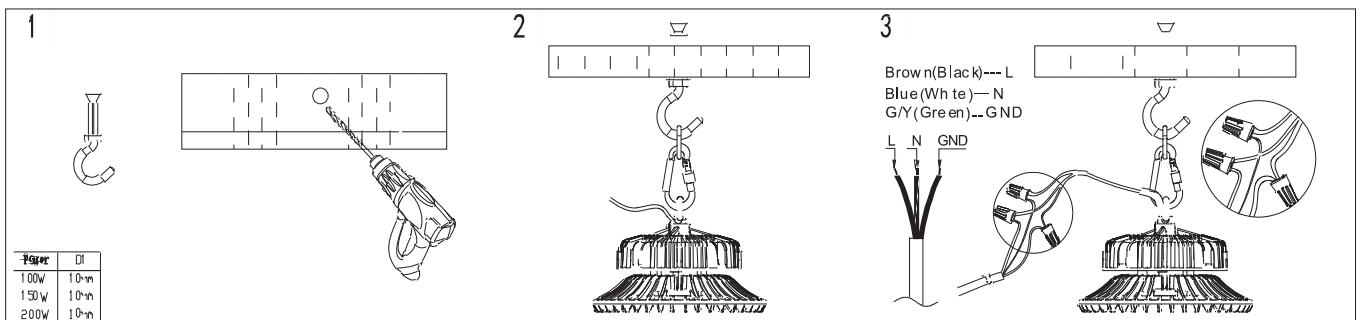

### P2 Mounting Bracket A

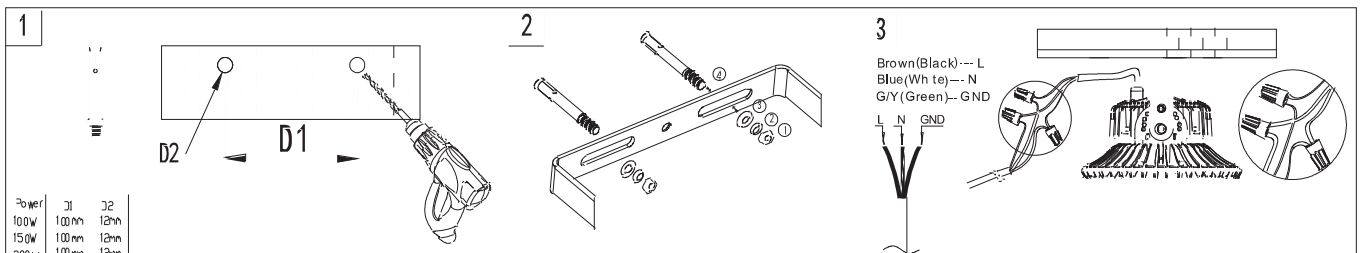

### P3 Mounting Ring

**1**

**2a**

**3a**

**2b**

**3b**

Brown(Black)---L  
Blue(White)---N  
G/Y(Green)---GND

L N GND

Power	D1
100W	10mm
150W	10mm
200W	10mm
240W	10mm

### P4 Mounting Bracket B

**1**

**2**

**3**

Brown(Black)---L  
Blue(White)---N  
G/Y(Green)---GND

L N GND

Power	D1	D2
100W	180mm	12mm
150W	180mm	12mm
200W	180mm	12mm

### P5 Mounting Ring

**1**

**2**

**3**

Brown(Black)---L  
Blue(White)---N  
G/Y(Green)---GND

L N GND

Power	D1
100W	10mm
150W	10mm
200W	10mm

### P6 Mounting Bracket C

**1**

**2**

**3**

Brown(Black)---L  
Blue(White)---N  
G/Y(Green)---GND

L N GND

Power	D1	D2
100W	100mm	12mm
150W	100mm	12mm
200W	100mm	12mm