



LED-Duo

Mångsidig belysning för kontor och allmänna lokaler



Mångsidig belysning

För både kontor, skolor och offentliga lokaler



Driftsförhållanden

LED-Duo är speciellt lämpad som allmänbelysning i kontorsmiljöer och offentliga lokaler. Armaturen kan levereras med galler, en opal akryl lins eller en klar räfflad lins beroende på användningsområde. Utrustad med lins så är armaturen stänksäker medan gallret är ett utmärkt val för allmänbelysning.



Installation och underhåll

LED-Duo kan monteras på suspenderade T-bar tak men också på väggar eller hängas upp som pendelbelysning m.m. Att installera eller byta Valtavallo LED-lysrör i armaturen kräver ingen el-behörighet.



Livslängd

LED Duo tillverkas i Finland och är utformad för två stycken Valtavallo LED-lysrör. När den används som en öppen armatur eller med bländskydd så behöver ljuskällan bytas ut efter 125.000 timmar, förutsatt att armaturen är utrustad med långlivade Valtavallo G4 + LED-lysrör. Med lins är den genomsnittliga livslängden för led lysröret ca 62.500 timmar.


LED-Duo

Mångsidig belysning för kontor och allmänna lokaler


Technical Specifications

Model	LED-Duo-209	LED-Duo-218	LED-Duo-222
Power	2x10W	2x19W	2x24W
Dimensions (length x width x height mm)	659 x 208 x 74	1269 x 208 x 74	1569 x 208 x 74
Socket Type	T8 / G13		
Input Voltage	230 V AC, 50/60 Hz		
Warranty	3 years		
Protection Class	IP-21, when equipped with louvre IP-44, when equipped with cover		
Housing Material	Body of white painted galvanized steel sheet or aluminium, ends of ABS plastic		
Cover Material	Acrylic with clear or opal surface, ribbed on the inside		
Connection	Through 3 x 2,5 mm ² Feed throughs in the centre of the luminaire (2 pcs.) Feed-through at both ends		
Installation	Wall surface, ceiling, suspension rail, hanging tube Suspended or recessed mounting		
Additional information	Applicable for LED tubes, can not be used with traditional fluorescent tubes. Through-wiring available on request. Light distribution data (Eulumdat files) available for lighting design.		

Dimensions

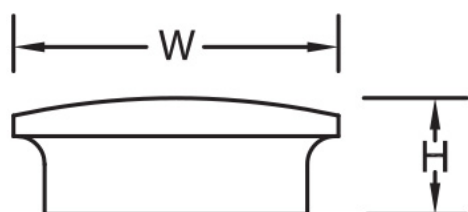

W = 208
H = 74

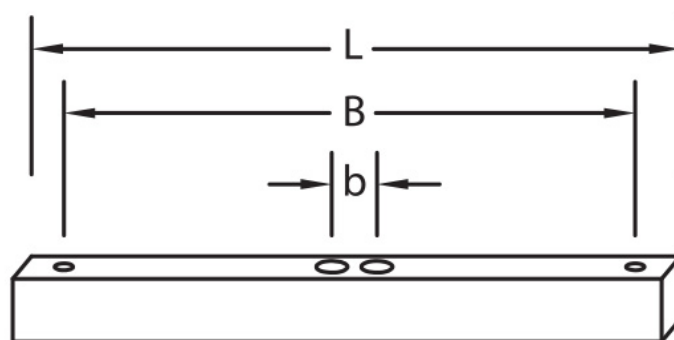

L = 659 / 1269 / 1569
B = 450 / 900 / 1200
b = 50



Made in Finland